

Industrial / Spectacles / 5X3

5X3 - High Contrast

Code: 5X3.03.33.04

Date: 06-03-23 1/2

The model 5X3 is realised with the exclusive Floating Lens technology that allows to anchor the lens only to a single point of the frame, while ensuring extreme stability and total possibility of self-adaptation to the face.



Frame mark (EU)

U EN166 FT CE

Lens mark (EU)

2-1.7 U 1 FT K N CE

Frame technology

Floating Lens, Rubber Terminal

Conditions of use

UV525

Lens technology

Anti-Scratch + Anti-Fog (KN - Vanguard ULTRA),
UV525

Lens color

Orange

Lens material

Polycarbonate

Frame color

Black/Orange

Standards

EN166, EN170

Scale number

(2-1.7)

Mechanical resistance

Low energy impact (F)

Optional requirements

Resistance to surface damage by fine particles (K), Resistance to fogging of oculars (N), Protection against high speed particles at extreme temperatures -5°/+55° C (T)


Optical class

Optical class (1)

Weight

31g

>> <https://www.univetsafety.com/en/products/safety/spectacles/5x3/5x3-high-contrast/>

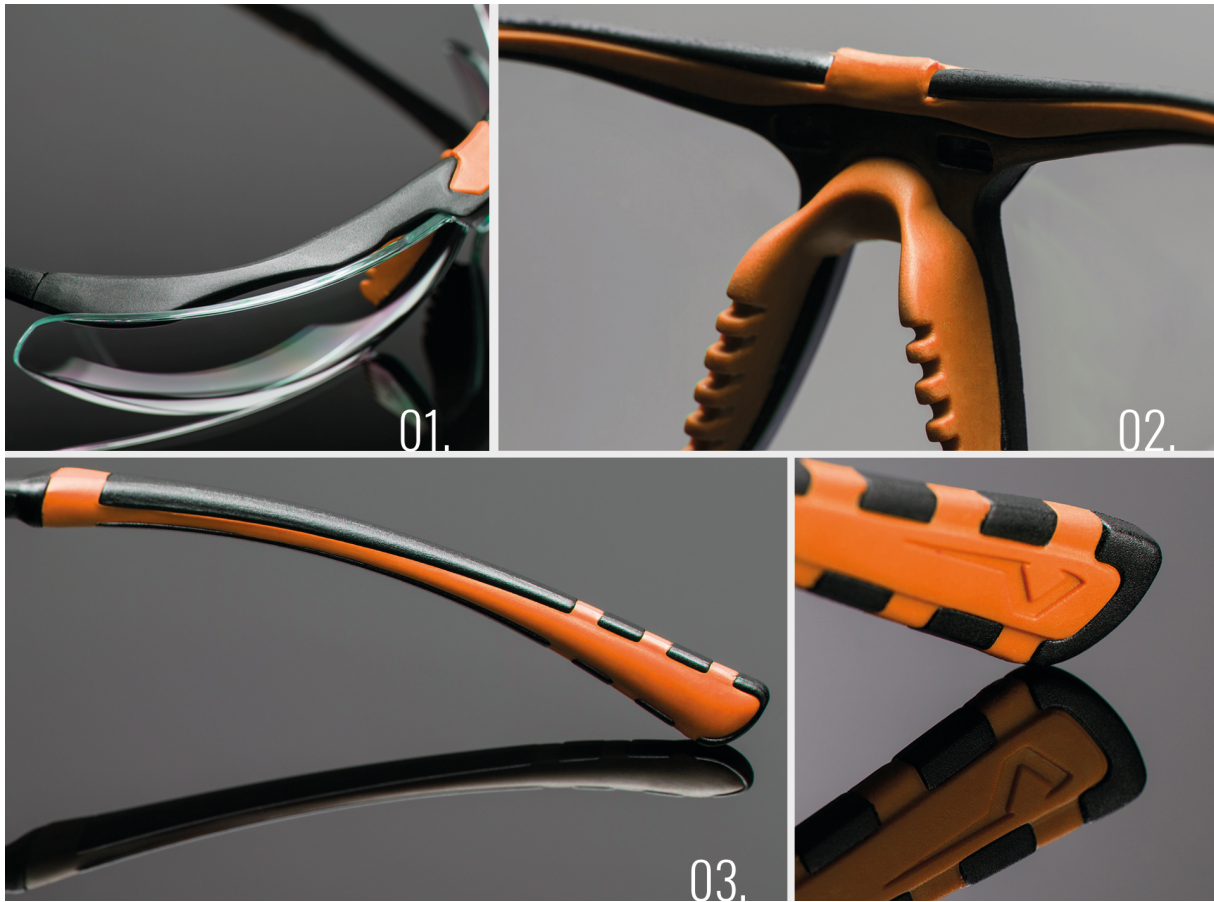

01.

FLOATING LENS

More flexible frame for an optimal fit on any face

02.

SWEATGUARD AND RUBBER NOSE PAD

Guarantee comfort and stability with a shockproof effect

03.

RUBBER TERMINAL

Improves adherence to the temples for a perfect fit

Attention! Any images on this page illustrate the frame technologies of the product family in question and may represent frame and lens colours that do not correspond to the product code of the following sheet.

HEADQUARTERS

Univet S.r.l. Via Giovanni Prati 87 25086 Rezzato - Telephone 030 2499411 - Fax 030 2499430 - info@univetsafety.com
VAT. IT02506570163