


DATASHEET

D-BOLT TYP 43 (AP-058)

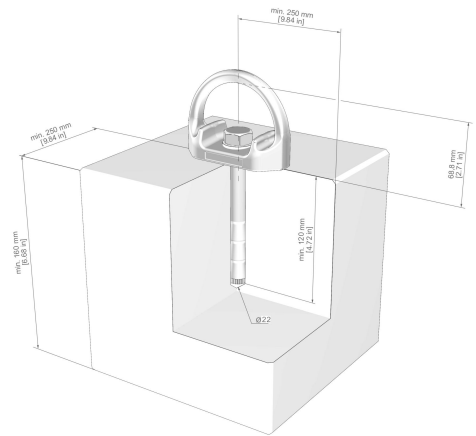

GENERAL

Art.Nr:	AP-TYP-43	Standards:	ABZ,CEN/TS 16415, EN 795:2012/A
GTIN:	4030281277477	Net weight:	0.95 kg
E-class number:	40-02-01-90	Gross weight:	1.03 kg
Customs tariff number:	73269098		

DATASHEET

D-BOLT TYP 43 (AP-058)

The D-BOLT AP-TYP-43 single anchor point has been tested and certified in accordance with EN 795 and CEN/TS 16415 and has a general building authority approval (abZ) from the German Institute for Building Technology (DIBt).

It is made of heat-treated steel 1.0503, has a yellow finish, and was specifically developed for use on concrete substrates (grade min. C20/25, dmin .=160 mm).

It is secured using an M16 anchor rod with an internal thread, which is bonded into the concrete using an approved injection mortar (not included).

It can withstand loads in all directions and can protect up to three people from falling using their personal fall protection equipment (PPE).

The minimum thickness of the substrate is 160 mm.

- Single anchor point, specifically for concrete substrates (dmin: 160 mm)
- The anchor rod with internal thread is secured using injection mortar (not included) (adhesive anchor), AK 1, approved for 3 people

FEATURES

Colour:	Yellow
Anchor point type:	Stationary anchor point
Type mounting base:	Concrete
Mounting type:	Concrete screw
Thickness mounting base:	160 mm
Maximum area required:	1.07 cm ²
Max. number of persons:	3
Maximum load:	500.00 kg
Rope access technique:	Yes

DIMENSIONS

Construction height:	80 mm
Foot plate length:	101 mm
Foot plate width:	46 mm
Hole spacing a:	0 mm
Hole spacing b:	0 mm
Minimum area required:	1.07 cm ²
Max height:	80 mm
Min. height:	80 mm
Diameter pillar:	0 mm
Diameter bore:	16 mm

MATERIAL

Material:	Steel
-----------	-------

DATASHEET

D-BOLT TYP 43 (AP-058)