


AT 065

Anchor beam

EN 795/B, CEN/TS 16415

Anchor beam is an anchor device compliant with EN 795 Type B and can be used for protection of 3 users at the same time. Anchor beam can be used only as personal protective equipment to protect user against a fall from a height, and cannot be used for lifting loads. Anchor beam has a range of installation on door or window opening. Work range of the beam is 780-1340 mm.

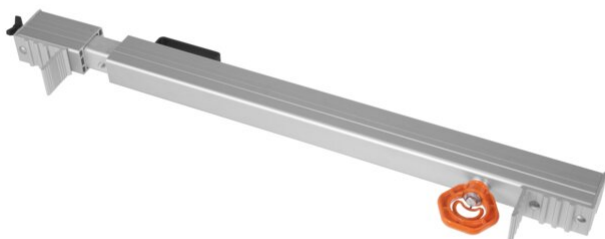

SPECIAL FEATURES



Protection for max. 3 users

PARAMETERS

Material	aluminium	Spacing min.	780 mm
Dimensions	1490 x 210 x 56 mm	Spacing max.	1340 mm
Dimensions after folding	1005 x 210 x 56 mm	Max. number of users	3
Weight	5.56 kg		
Static strength	14 kN		
Bore diameter of the catch point Ø	24 mm		

VARIANTS

ref. no.

AT065

AT 065

Anchor beam

ADDITIONAL PHOTOS

